

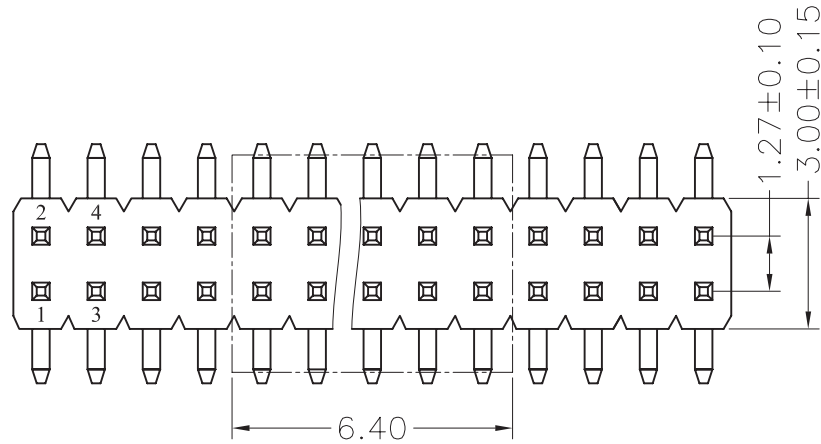
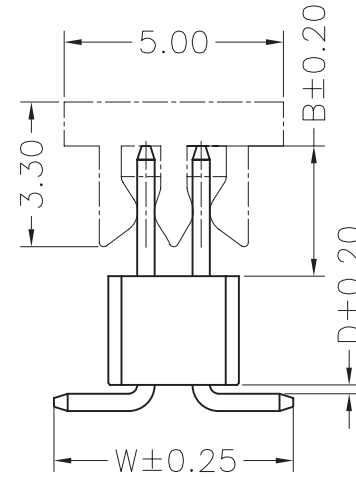


REV.	ECN	DESCRIPTION	APPROVED
A	YTXXXX	RELEASE TO CUSTOMER.	SKY 02/23/11

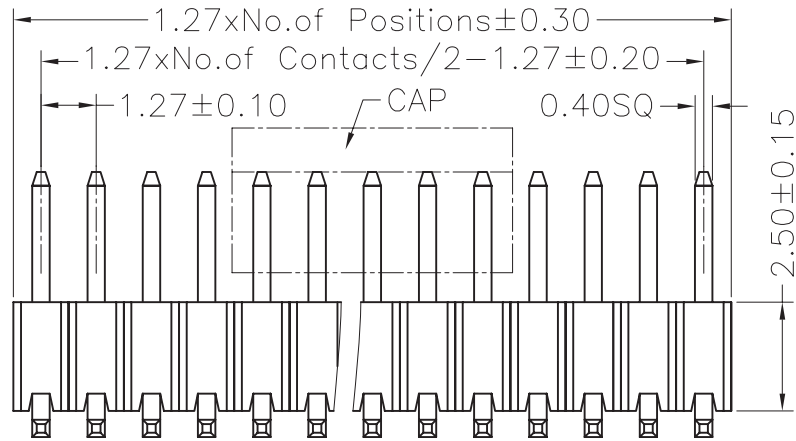

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

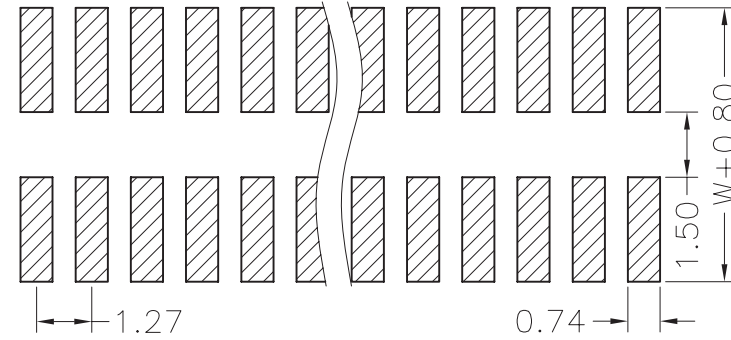

Dimension antitheses list			
ITEM	B	D	W
Standard	4.00	0.20	5.50
Alternate			

NOTES:
 Current Rating:1AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C
 Contact Material:Brass
 Contact plating: **Goldflash** Over Ni
 Insulator Material:PA6T+30%GF(UL94V-0)

Part No. Information:
 3127. 6XX092. 31XG100

No. of Pins per
 ROW:02~40PIN

Packing:
 1=PE Bag
 3=Tube
 4=Tube+CAP
 5=Package+CAP
 8=BOX



UNLESS OTHERWISE SPECIFIED TOLERANCES		UTE YOUTE ELECTRONIC CO.,LTD			
.X	+/- 0.35	X	+/- 3.0°	CUSTOMER DRAWING DESCRIPTION: PH 1.27 2XNP SMT H=2.5 L=9.2 (B=4.0 D0.2) 展脚5.5 DRAWING NO. 3127. 6XX092. 31XG100 PART NO. 3127. 6XX092. 31XG100	
.XX	+/- 0.25	.X	+/- 2.0°		
.XXX	+/- 0.15	.XX	+/- 1.0°		
DRAWING FILE :		TITLE		REV.	
FOR MATERIALS AND FINISHES SEE NOTES		CUSTOMER DRAWING		A	
PROJECTION		DRAWN	PING LI 02/23/11	SIZE	A4
		CHECKED	RAIN FAN 02/23/11	PART NO. 3127. 6XX092. 31XG100	
UNIT	MM	APPROVED	SKY WANG 02/23/11	SCALE	NONE
			SHEET	1	OF 1